



What makes a power strip "Medical Grade"?

For a power strip to qualify as "medical grade" it must:

- Be used with medical equipment inside Patient Care Areas
- Conform to Safety Standard UL 60601-1 or UL 1363A
- Have receptacle covers that can only be opened with the use of a tool*
- Feature hospital grade plugs and receptacles
- Have an enclosure leakage current that does not exceed 0.1 mA in normal condition
- Be permanently mounted to moveable equipment
- Not have a manual on/off switch

* Anything other than a hand

Applicable Codes & Standards

- NFPA 99 Health Care Facilities Code
- NFPA 70 (National Electric Code) Article 517 Health Care Facilities
- UL 60601-1 Medical Electrical Equipment, Part 1: General Requirements for Safety
- UL 60950-1 Information Technology Equipment Safety, Part 1: General Requirements
- UL 1363A Special Purpose Relocatable Power Taps
- UL 1449 Surge Protective Devices

For more information regarding application codes and standards, please visit leviton.com/healthcarecodes

Patient Care Areas As defined in NFPA 99 – 2021 Edition

Patient Care Vicinity

(Depicted below)

A space, within a location intended for examination and treatment of patients, extending 6 feet (1.8 m) beyond the normal location of the bed, chair, table, treadmill, or other device that supports the patient during examination and treatment and extending vertically 7.5 feet (2.3 m) above the floor.

Patient Care Space

Any space of a health care facility wherein patients are intended to be examined or treated. This includes:

- Basic Care Spaces (e.g. exam or treatment rooms in clinics, dental offices, nursing homes, etc.)
- General Care Spaces (e.g. patient bedrooms, dialysis rooms, procedural rooms, etc.)
- Critical Care Spaces (e.g. intensive care rooms, operating rooms, delivery rooms, etc.)




For a full list of requirements for the use of medical grade power strips and other electrical equipment in patient-care areas, see NFPA 99 Chapter 10.

What is Load Monitoring **[**] Inform™ Technology?

A simple and efficient way to improve code compliance.

NFPA 99 Article 10.2.3.6 mandates:

The sum of the ampacity of all appliances connected to the outlets does not exceed 75 percent of the ampacity of the flexible cord supplying the outlets.



LEVITON

MEDICAL GRADE

(i) inform

D POWER

PROTECTION RATING (VPR) PROTECTION

LOAD MONITOR

Inform[™] monitors the load of connected devices so that you don't have to, eliminating the need for manual calculations. When the NFPA 99 limit (75%) has been exceeded, a line-of-sight LED indication will activate.

To learn more about Inform[™] Technology and innovations please visit <u>leviton.com/inform</u>

Leviton Medical Grade Power Strips are Special Purpose Relocatable Power Taps (SPRPTs). According to Centers for Medicare & Medicaid Services (CMS):

Power strips providing power to patient care-related electrical equipment must be Special-Purpose Relocatable Power Taps (SPRPT) listed as UL 1363A or UL 60601-1.

Specifications

Electrical SpecificationsCurrent15 A (12 A max continuous load) or 20 A (16 A max continuous load)Voltage125 VFrequency60 HzSurge Technology"MOVPerformance DataMOVVoltage Protection Rating (VPR)"600 V (L-N), 600 V (L-G), 500 V (N-G)Max. Continuous Operating Voltage (MCOV)"150 VMax. Continuous Operating Voltage (MCOV)"150 VMax. Leakage Current, Per Mode"27 kAMax. Leakage Current<100 µAMaterial SpecificationsLine Cord#14/3 SJT (15 A models) or #12/3 SJT (20 A models)EnclosurePowder Coated Steel (18 ga)Outlet CoversPolypropyleneMechanical SpecificationsNEMA 5-15P or NEMA 5-20PHG Plug ConfigurationNEMA 5-15P or NEMA 5-20REnvironmental SpecificationsNEMA 5-15P or NEMA 5-20REnvironmental Specifications11 4 °F to 122 °F (-10 °C to +40 °C)Storage Temperature32 °F to 104 °F (0 °C to +40 °C)Storage Temperature14 °F to 122 °F (-10 °C to +50 °C)StandardsUL 60601-1/ C22.2 No. 60601-1; UL 60950-1/ C22.2 No. 60950-1; UL 1363A/ C22.2 No. 21; UL 1449/ C22.2 No. 8"NFPANFPA 99 2021 EditionWarranty5-Year LimitedMounting Bracket for Medical Grade Power Strips (5300M-BKT)Material SpecificationsPowder Coated AluminumBracket / RetainerPowder Coated AluminumMounting HardwareStainless Steel	Medical Grade Power Strips				
Voltage125 VFrequency60 HzSurge Technology"MOVPerformance DataMOVVoltage Protection Rating (VPR)"600 V (L-N), 600 V (L-G), 500 V (N-G)Max. Continuous Operating Voltage (MCOV)"150 VMax. Surge Current, Per Mode"27 kAMax. Leakage Current<100 µAMaterial Specifications112/3 SJT (20 A models)EnclosurePowder Coated Steel (18 ga)Outlet CoversPolypropyleneMechanical SpecificationsNEMA 5-15P or NEMA 5-20PHG Plug ConfigurationNEMA 5-15P or NEMA 5-20PHG Outlet ConfigurationNEMA 5-15P or NEMA 5-20PEnvironmental Specifications32 °F to 104 °F (0 °C to +40 °C)Storage Temperature32 °F to 104 °F (0 °C to +40 °C)Storage Temperature14 °F to 122 °F (-10 °C to +50 °C)StandardsUL 60601-1/ C22.2 No. 60601-1; UL 60950-1/ C22.2 No. 22.2 No. 21; UL 1449/ C22.2 No. 60950-1; UL 1363A/ C22.2 No. 21; UL 1449/ C22.2 No. 60950-1; UL 60950-1/ C22.2 No. 60950-1; UL 60950-1/ C22.2 No. 60950-1; UL 60950-1/ C22.2 No. 8"NFPANFPA 99 2021 EditionWarranty5-Year LimitedMounting Bracket for Medical Grade Power Strips (5300M-BKT)Material SpecificationsFowder Coated Aluminum	Electrical Specifications				
TrequencyCH I GO HzSurge Technology"MOVPerformance DataMOVVoltage Protection Rating (VPR)"600 V (L-N), 600 V (L-G), 500 V (N-G)Max. Continuous Operating Voltage (MCOV)"150 VMax. Continuous Operating Voltage (MCOV)"27 kAMax. Surge Current, Per Mode"27 kAMaterial SpecificationsLine Cord#14/3 SJT (15 A models) or #12/3 SJT (20 A models)EnclosurePowder Coated Steel (18 ga)Outlet CoversPolypropyleneMechanical SpecificationsHG Plug ConfigurationNEMA 5-15P or NEMA 5-20PHG Outlet ConfigurationNEMA 5-15R or NEMA 5-20PHG Outlet ConfigurationNEMA 5-15R or NEMA 5-20PHG Outlet ConfigurationNEMA 5-15R or NEMA 5-20REnvironmental Specifications32 °F to 104 °F (0 °C to +40 °C)Storage Temperature32 °F to 104 °F (0 °C to +50 °C)StandardsUL 60601-1/ C22.2 No. 60601-1; UL 60950-1/ C22.2 No. 60950-1; UL 1363A/ C22.2 No. 21; UL 1449/ C22.2 No. 60950-1; UL 1363A/ C22.2 No. 21; UL 1449/ C22.2 No. 8"NFPANFPA 99 2021 EditionWarranty5-Year LimitedMounting Bracket for Medical Grade Power Strips (5300M-BKT)Material SpecificationsFowder Coated Aluminum	Current	15 A (12 A max continuous load) or 20 A (16 A max continuous load)			
Surge Technology"MOVPerformance DataMOVVoltage Protection Rating (VPR)"600 V (L-N), 600 V (L-G), 500 V (N-G)Max. Continuous Operating Voltage (MCOV)"150 VMax. Surge Current, Per Mode"27 kAMax. Leakage Current<100 µA	Voltage	125 V			
Performance DataVoltage Protection Rating (VPR)"600 V (L-N), 600 V (L-G), 500 V (N-G)Max. Continuous Operating Voltage (MCOV)"150 VMax. Surge Current, Per Mode"27 kAMax. Leakage Current<100 µA	Frequency	60 Hz			
Voltage Protection Rating (VPR)"600 V (L-N), 600 V (L-G), 500 V (N-G)Max. Continuous Operating Voltage (MCOV)"150 VMax. Surge Current, Per Mode"27 kAMax. Leakage Current<100 µA	Surge Technology**	MOV			
Max. Continuous Operating Voltage (MCOV)"150 VMax. Surge Current, Per Mode"27 kAMax. Leakage Current<100 μA	Performance Data				
(MCOV)"130 VMax. Surge Current, Per Mode"27 kAMax. Leakage Current<100 μA	Voltage Protection Rating (VPR)**	600 V (L-N), 600 V (L-G), 500 V (N-G)			
Max. Leakage Current<100 μA		150 V			
Material SpecificationsLine Cord#14/3 SJT (15 A models) or #12/3 SJT (20 A models)EnclosurePowder Coated Steel (18 ga)Outlet CoversPolypropyleneMechanical SpecificationsPolypropyleneHG Plug ConfigurationNEMA 5-15P or NEMA 5-20PHG Outlet ConfigurationNEMA 5-15R or NEMA 5-20REnvironmental SpecificationsOperating Temperature32 °F to 104 °F (0 °C to +40 °C)Storage Temperature14 °F to 122 °F (-10 °C to +50 °C)StandardsUL 60601-1/ C22.2 No. 60601-1; UL 60950-1/ C22.2 No. 60950-1; UL 1363A/ C22.2 No. 21; UL 1449/ C22.2 No.8"NFPANFPA 99 2021 EditionWarranty5-Year LimitedProduct Warranty5-Year LimitedMounting Bracket for Medical Grade Power Strips (5300M-BKT)Material SpecificationsPowder Coated Aluminum	Max. Surge Current, Per Mode**	27 kA			
Line Cord#14/3 SJT (15 A models) or #12/3 SJT (20 A models)EnclosurePowder Coated Steel (18 ga)Outlet CoversPolypropyleneMechanical SpecificationsNEMA 5-15P or NEMA 5-20PHG Plug ConfigurationNEMA 5-15R or NEMA 5-20REnvironmental SpecificationsNEMA 5-15R or NEMA 5-20ROperating Temperature32 °F to 104 °F (0 °C to +40 °C)Storage Temperature14 °F to 122 °F (-10 °C to +50 °C)StandardsUL 60601-1/ C22.2 No. 60601-1; UL 60950-1/ C22.2 No. 60950-1; UL 1363A/ C22.2 No. 21; UL 1449/ C22.2 No. 8"NFPANFPA 99 2021 EditionWarranty5-Year LimitedProduct Warranty5-Year LimitedMounting Bracket for Medical Grade Power Strips (5300M-BKT)Material SpecificationsPowder Coated Aluminum	Max. Leakage Current	<100 µA			
EnclosurePowder Coated Steel (18 ga)Outlet CoversPolypropyleneMechanical SpecificationsNEMA 5-15P or NEMA 5-20PHG Plug ConfigurationNEMA 5-15R or NEMA 5-20REnvironmental SpecificationsNEMA 5-15R or NEMA 5-20ROperating Temperature32 °F to 104 °F (0 °C to +40 °C)Storage Temperature14 °F to 122 °F (-10 °C to +50 °C)StandardsUL 60601-1/ C22.2 No. 60601-1; UL 60950-1/ C22.2 No. 60950-1; UL 1363A/ C22.2 No. 21; UL 1449/ C22.2 No.8"NFPANFPA 99 2021 EditionWarranty5-Year LimitedProduct Warranty5-Year LimitedMounting Bracket for Medical Grade Power Strips (5300M-BKT)Material SpecificationsPowder Coated Aluminum	Material Specifications				
InstructionPolypropyleneMechanical SpecificationsNEMA 5-15P or NEMA 5-20PHG Plug ConfigurationNEMA 5-15R or NEMA 5-20REnvironmental SpecificationsNEMA 5-15R or NEMA 5-20ROperating Temperature32 °F to 104 °F (0 °C to +40 °C)Storage Temperature14 °F to 122 °F (-10 °C to +50 °C)StandardsUL 60601-1/ C22.2 No. 60601-1; UL 60950-1/ C22.2 No. 60950-1; UL 1363A/ C22.2 No. 21; UL 1449/ C22.2 No.8"NFPANFPA 99 2021 EditionWarranty5-Year LimitedProduct Warranty5-Year LimitedMounting Bracket for Medical Grade Power Strips (5300M-BKT)Material SpecificationsBracket / RetainerPowder Coated Aluminum	Line Cord	#14/3 SJT (15 A models) or #12/3 SJT (20 A models)			
Mechanical SpecificationsHG Plug ConfigurationNEMA 5-15P or NEMA 5-20PHG Outlet ConfigurationNEMA 5-15R or NEMA 5-20REnvironmental SpecificationsOperating Temperature32 °F to 104 °F (0 °C to +40 °C)Storage Temperature14 °F to 122 °F (-10 °C to +50 °C)StandardsUL 60601-1/ C22.2 No. 60601-1; UL 60950-1/ C22.2 No. 60950-1; UL 1363A/ C22.2 No. 21; UL 1449/ C22.2 No. 8"NFPANFPA 99 2021 EditionWarranty5-Year LimitedProduct Warranty5-Year LimitedMounting Bracket for Medical Grade Power Strips (5300M-BKT)Material SpecificationsBracket / RetainerPowder Coated Aluminum	Enclosure	Powder Coated Steel (18 ga)			
HG Plug ConfigurationNEMA 5-15P or NEMA 5-20PHG Outlet ConfigurationNEMA 5-15R or NEMA 5-20REnvironmental SpecificationsNEMA 5-15R or NEMA 5-20ROperating Temperature32 °F to 104 °F (0 °C to +40 °C)Storage Temperature14 °F to 122 °F (-10 °C to +50 °C)StandardsUL 60601-1/ C22.2 No. 60601-1; UL 60950-1/ C22.2 No. 60950-1; UL 1363A/ C22.2 No. 21; UL 1449/ C22.2 No.8"NFPAUL 60601-1/ C22.2 No. 60950-1; UL 1363A/ C22.2 No. 21; UL 1449/ C22.2 No.8"NFPANFPA 99 2021 EditionWarranty5-Year LimitedProduct Warranty5-Year LimitedMounting Bracket for Medical Grade Power Strips (5300M-BKT)Material SpecificationsPowder Coated Aluminum	Outlet Covers	Polypropylene			
HG Outlet ConfigurationNEMA 5-15R or NEMA 5-20REnvironmental Specifications32 °F to 104 °F (0 °C to +40 °C)Operating Temperature32 °F to 104 °F (0 °C to +40 °C)Storage Temperature14 °F to 122 °F (-10 °C to +50 °C)StandardsUL 60601-1/ C22.2 No. 60601-1; UL 60950-1/ C22.2 No. 60950-1; UL 1363A/ C22.2 No. 21; UL 1449/ C22.2 No. 8"UL/ CSA/ NOM'UL 60601-1/ C22.2 No. 60950-1; UL 1363A/ C22.2 No. 21; UL 1449/ C22.2 No. 60950-1; UL 1363A/ C22.2 No. 21; UL 1449/ C22.2 No. 60950-1; UL 1363A/ C22.2 No. 21; UL 1449/ C22.2 No. 8"NFPANFPA 99 2021 EditionWarranty5-Year LimitedProduct Warranty5-Year LimitedMounting Bracket for Medical Grade Power Strips (5300M-BKT)Material SpecificationsPowder Coated Aluminum	Mechanical Specifications				
Environmental SpecificationsOperating Temperature32 °F to 104 °F (0 °C to +40 °C)Storage Temperature14 °F to 122 °F (-10 °C to +50 °C)StandardsUL 60601-1/ C22.2 No. 60601-1; UL 60950-1/ C22.2 No. 60950-1; UL 1363A/ C22.2 No. 21; UL 1449/ C22.2 No. 8"VL/ CSA/ NOM*UL 60601-1/ C22.2 No. 60950-1; UL 1363A/ C22.2 No. 21; UL 1449/ C22.2 No. 8"NFPANFPA 99 2021 EditionWarranty5-Year LimitedProduct Warranty5-Year LimitedMounting Bracket for Medical Grade Power Strips (5300M-BKT)Material SpecificationsBracket / RetainerPowder Coated Aluminum	HG Plug Configuration	NEMA 5-15P or NEMA 5-20P			
Operating Temperature32 °F to 104 °F (0 °C to +40 °C)Storage Temperature14 °F to 122 °F (-10 °C to +50 °C)StandardsUL 60601-1/ C22.2 No. 60601-1; UL 60950-1/ C22.2 No. 60950-1; UL 1363A/ C22.2 No. 21; UL 1449/ C22.2 No. 8"VL/ CSA/ NOM'0 NFPA 99 2021 EditionWarrantyVProduct Warranty5-Year LimitedMounting Bracket for Medical Grade Power Strips (5300M-BKT)Material SpecificationsBracket / RetainerPowder Coated Aluminum	HG Outlet Configuration	NEMA 5-15R or NEMA 5-20R			
Storage Temperature14 °F to 122 °F (-10 °C to +50 °C)StandardsUL 60601-1/ C22.2 No. 60601-1; UL 60950-1/ C22.2 No. 60950-1; UL 1363A/ C22.2 No. 21; UL 1449/ C22.2 No. 8"NFPANFPA 99 2021 EditionWarrantyS-Year LimitedProduct Warranty5-Year LimitedMounting Bracket for Medical Grade Power Strips (5300M-BKT)Material SpecificationsBracket / RetainerPowder Coated Aluminum	Environmental Specifications				
StandardsUL StandardsUL CSA/ NOM"UL CSA/ NOM"VERTION NEPAWarrantyProduct WarrantyS-Year LimitedMounting Bracket for Medical Grade Power Strips (5300M-BKT)Material SpecificationsBracket / RetainerPowder Coated Aluminum	Operating Temperature	32 °F to 104 °F (0 °C to +40 °C)			
UL 60601-1/ C22.2 No. 60601-1; UL 60950-1/ C22.2 No. 60950-1; UL 1363A/ C22.2 No. 21; UL 1449/ C22.2 No.8"NFPANFPA 99 2021 EditionWarrantyS-Year LimitedProduct WarrantyS-Year LimitedMounting Bracket for Medical Grade Power Strips (5300M-BKT)Material SpecificationsBracket / RetainerPowder Coated Aluminum	Storage Temperature	14 °F to 122 °F (-10 °C to +50 °C)			
UL/ CSA/ NOM*C22.2 No. 60950-1; UL 1363A/ C22.2 No. 21; UL 1449/ C22.2 No.8"NFPANFPA 99 2021 EditionWarrantyS-Year LimitedProduct WarrantyS-Year LimitedMounting Bracket for Medical Grade Power Strips (5300M-BKT)Material SpecificationsBracket / RetainerPowder Coated Aluminum	Standards				
Warranty 5-Year Limited Product Warranty 5-Year Limited Mounting Bracket for Medical Grade Power Strips (5300M-BKT) Material Specifications Bracket / Retainer Powder Coated Aluminum	UL/ CSA/ NOM"	C22.2 No. 60950-1; UL 1363A/ C22.2 No. 21; UL 1449/			
Product Warranty 5-Year Limited Mounting Bracket for Medical Grade Power Strips (5300M-BKT) Material Specifications Bracket / Retainer Powder Coated Aluminum	NFPA	NFPA 99 2021 Edition			
Mounting Bracket for Medical Grade Power Strips (5300M-BKT) Material Specifications Bracket / Retainer Powder Coated Aluminum	Warranty				
Material Specifications Bracket / Retainer Powder Coated Aluminum	Product Warranty	5-Year Limited			
Material Specifications Bracket / Retainer Powder Coated Aluminum	Mounting Bracket for Medical	Grade Power Strips (5300M-BKT)			
Bracket / Retainer Powder Coated Aluminum					
		Powder Coated Aluminum			

* NOM and CSA Standards (C22.2) do not apply to models with Inform™ Technology * Spec is relevant to Surge Protective models only

Ordering Information

Stock Configurations	Current Rating	AC Power Cord Length	2 Outlet	4 Outlet	6 Outlet
Medical Grade Power Strips	15 A (12 A max continuous load)	7 Feet	5302M-1N7	5304M-1N7	5306M-1N7
		15 Feet	5302M-1N5	5304M-1N5	5306M-1N5
	20 A (16 A max continuous load)	7 Feet	5302M-2N7	5304M-2N7	5306M-2N7
		15 Feet	5302M-2N5	5304M-2N5	5306M-2N5
Surge Protective Medical Grade Power Strips	15 A (12 A max continuous load)	7 Feet	5302M-1S7	5304M-1S7	5306M-1S7
		15 Feet	5302M-1S5	5304M-1S5	5306M-1S5
	20 A (16 A max continuous load)	7 Feet	5302M-2S7	5304M-2S7	5306M-2S7
		15 Feet	5302M-2S5	5304M-2S5	5306M-2S5
Medical Grade Power Strips with Load Monitoring Inform [™] Technology	15 A (12 A max continuous load)	7 Feet	—	53C4M-1N7	53C6M-1N7
		15 Feet	—	53C4M-1N5	53C6M-1N5
	20 A (16 A max continuous load)	7 Feet	—	53C4M-2N7	53C6M-2N7
		15 Feet	—	53C4M-2N5	53C6M-2N5
Surge Protective Medical Grade Power Strips with Load Monitoring Inform [™] Technology	15 A (12 A max continuous load)	7 Feet	—	53C4M-1S7	53C6M-1S7
		15 Feet	_	53C4M-1S5	53C6M-1S5
	20 A (16 A max continuous load)	7 Feet	_	53C4M-2S7	53C6M-2S7
		15 Feet	—	53C4M-2S5	53C6M-2S5

Replacement

Outlet Covers

Each will cover

two outlets


5300M-CVR

All strips available with flying leads - contact your Leviton sales representative for details.

Additional Accessories (Sold Separately)

Dimensions

Medical Grade Power Strips

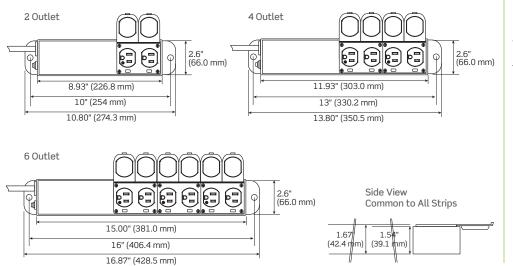

Mounting Bracket

Mounting


mechanisms

5300M-BKT

Includes top and

bottom mounting

Bracket



Visit our Website at: leviton.com/medstrips email: inform@leviton.com commercial@leviton.com 040723

Leviton Manufacturing Co., Inc.

201 N Service Rd, Melville, NY 11747 Telephone: 1-800-323-8920 • FAX: 1-800-832-9538 Tech Line: 1-800-824-3005 (M-F 8AM-10PM; Sat 9AM-7PM; Sun 9AM-5PM)



© 2023 Leviton Manufacturing Co., Inc. All rights reserved.