

Decora Smart® No-Neutral Dimmer



APPLICATION

Leviton's Decora Smart No-Neutral Dimmer, a new addition to the My Leviton family, is the perfect retrofit solution to install smart lighting control in homes that may not have neutral wiring available in the wallbox. There's now a My Leviton solution for every room and home. Pair with a MLWSB Decora Smart Wi-Fi Bridge for connectivity to the My Leviton app for scheduling and remote control, or use your voice to control lighting with Amazon Alexa, Google Assistant, or Apple Siri. Decora Smart dimmers provide full-range dimming of dimmable LED, CFL, incandescent and MLV lighting with custom settings for preset light levels, fade rates, and bulb types, as well as on/off control of non-dimmable loads.

The Decora Smart No-Neutral Dimmer features intuitive ON/OFF and DIM/BRIGHT control, vanishing LED light-level indication, and is compatible with Leviton color change kits and Decora® wallplates to match the aesthetic of other smart and non-smart Decora devices in the home.

Combine with other Decora Smart devices to create a Whole Home experience with scheduling, lighting scenes, and app control from anywhere.


WORKS WITH MY LEVITON

The My Leviton app provides control from anywhere, device customization, scheduling, management of other Decora Smart devices such as plug-ins, and connectivity to My Leviton integration partners including voice assistants.

- Use the My Leviton app to set up the Wi-Fi Bridge and Decora Smart No-Neutral Dimmers and Switches
- Schedule lights to adjust at specific times or based on sunrise/sunset
- Adjust custom settings, bulb types, and create lighting scenes to activate multiple devices at once
- Optionally use the auto-shutoff feature to act as a countdown timer in closets, hallways, and bathrooms
- Utilize the Away mode to randomize schedules of selected devices to provide a lived-in appearance when away from home

THE DECORA SMART WI-FI BRIDGE

This product requires a MLWSB Decora Smart Wi-Fi Bridge to enable smart features such as My Leviton App control, scenes, schedules, Anywhere Companion 3-way connectivity, and integration with smart home services such as voice assistants. One MLWSB Decora Smart Wi-Fi Bridge supports up to 25 No-Neutral Dimmers and Switches. Multiple Bridges can be installed per residence to provide increased coverage in larger homes.

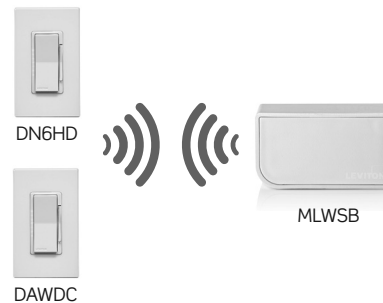

Works with Amazon Alexa

Use your voice to control connected lighting from compatible Alexa® built-in devices such as an Amazon Echo, Echo Show, the Alexa app, or even the Decora Smart Voice Dimmer. Multiple Bridges can be installed per residence to provide increased coverage in larger homes.

Works with Hey Google

Use your voice to control connected lighting with Google Assistant™ or from the Google Home app.

Works with Apple HomeKit

Add to an Apple HomeKit™ network and control with the native Apple Home app on your iOS device, providing compatibility with Siri® for voice control.

Works with IFTTT (If This Then That)

Use the free IFTTT service to connect your My Leviton devices with a wide range of supported Internet of Things (IoT) enabled devices and services to create a smarter home automation experience.

Works with Schlage

Use the My Leviton app to connect to your Schlage Encode™ Smart Wi-Fi Deadbolt and trigger lighting scenes based on lock activity. Make certain you never walk into a dark home when you arrive and make sure select lights are turned off when leaving.

WIRE-FREE 3-WAY/MULTI-LOCATION CONTROL

The Decora Smart No-Neutral Dimmer can be used in 3-way or multi-way applications when paired with a wire-free DAWDC Anywhere Dimmer Companion or a DAWSC Anywhere Switch Companion device. Anywhere Companions look like a traditional dimmer and switch and are easily installed onto an interior wall surface or in an existing wallbox with no wiring required. Up to 3 Companions can be associated to a DN6HD No-Neutral Dimmer via a Decora Smart Wi-Fi Bridge.

FEATURES AND BENEFITS

- Control your lights from anywhere using the free My Leviton app for iOS and Android
- Connects to required Decora Smart Wi-Fi Bridge, MLWSB
- Simplify control of your home – schedule lights and connected loads to dim/brighten or turn ON/OFF at specific times or based on sunrise/sunset, easily group your smart devices into rooms, and create scenes to activate multiple lights at once
- Works with Amazon Alexa, Hey Google, or Apple HomeKit/ Siri via a Decora Smart Wi-Fi Bridge
- Full Range Dimming – Best-in-class dimming performance with custom settings in the My Leviton app for preset lighting levels, fade rates, bulb types and more
- Off Means Off – Low-wattage LED bulbs always turn off
- Double press the top rocker to always turn ON at max brightness
- Ease of installation with a product depth of 1.3” and wire leads
- Vanishing LEDs and 6 color choices ensure a perfect match with other Decora devices
- Pre-set schedules live inside each device, so your schedules run even during a temporary internet outage
- Single-pole, and support for 3-way/multi-way applications with the wire-free DAWDC Anywhere Dimmer Companion or DAWSC Anywhere Switch Companion (requires Decora Smart Wi-Fi Bridge)
- Using My Leviton, control up to 99 devices, 50 rooms, 50 activities, and 50 schedules per residence and up to 20 residences per account
- Neutral wire not required for installation

RATINGS

- General Use – 120VAC, 60Hz
- LED/CFL – 300W
- Incandescent – 600W
- MLV – 600VA

NETWORK

- Frequency – 2.4GHz
- Range – 50 ft

SPECIFICATIONS

- Operating Temperature: 0°C - 40°C (32°F - 104°F)
- Operating Humidity: 10% to 90%, non-condensing


WARRANTY INFORMATION

- Two-Year Limited Warranty

AGENCY STANDARDS AND COMPLIANCE

- Complies with UL 1472, CSA C22.2 No. 184
- CSA Listed for USA and Canada
- NOM Certified
- Complies with FCC Part 15, Class B
- NEMA SSL 7A

DN6HD WIRING DIAGRAM

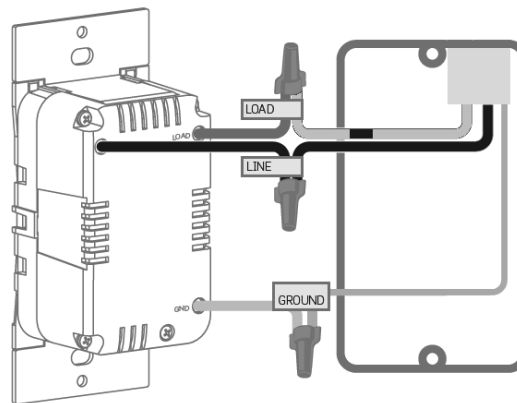

Note: Line, Load and Ground connections are required for proper operation.

ORDERING INFORMATION

DESCRIPTION	CAT. NO.
Decora Smart No-Neutral Dimmer	DN6HD
Decora Smart Wi-Fi Bridge, Wi-Fi Certified	MLWSB
ACCESSORIES	
Anywhere Dimmer Companion (No wiring required)	DAWDC
Anywhere Switch Companion (No wiring required)	DAWSC
Dimmer Color Change Kit, Black	DDKIT-00E
Dimmer Color Change Kit, Gray	DDKIT-00G
Dimmer Color Change Kit, Brown	DDKIT-00B
Dimmer Color Change Kit, Ivory	DDKIT-00I
Dimmer Color Change Kit, White	DDKIT-00W
Dimmer Color Change Kit, Light Almond	DDKIT-00T

Leviton Mfg. Co., Inc.

201 North Service Road, Melville, NY 11747 Tech Line: 1-800-824-3005 Fax: 1-800-832-9538 www.leviton.com
 © 2022 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.

JA-011222
 REV JAN 2022