

# OPT-X<sup>™</sup> 1000i SDX Rack-Mount Enclosures 1RU, 2RU, 3RU, & 4RU

## APPLICATION

The OPT-X 1000i SDX Rack-Mount Enclosure allows for inter-connect or cross-connect between backbone cable and active equipment while using minimum rack space in a frame or cabinet setting. The enclosure's features and design allow for easy field termination of connectors, splicing, or pre-terminated plug-and-play solutions. The fiber enclosure is primarily used in data centers, equipment rooms, and telecommunication rooms.



## **SPECIFICATION**

Fiber enclosure shall be available in 1RU, 2RU, 3RU, and 4RU versions to accommodate termination and splicing of fiber. A removable sliding tray shall also be available in 1RU and 2RU enclosures. Adapter bulkhead shall accept SC, LC, ST, and MTP® adapters, and Plug-n-Play MTP cassettes. 4RU enclosures shall accommodate up to 15 adapter plates for 360 fiber connections. Fiber cable management for routing, storage, and protection shall accept patch cords, tight-buffer fiber, and backbone cables. Rear fiber cable management rings shall be stackable and configurable in quarter-, half-, or full-ring arrangements. Enclosure shall be constructed of 16-gauge steel with a powder-coated black finish and be mountable in either a 19-inch or 23-inch rack or cabinet frame. An optional locking door feature shall be available.

## FEATURES

- 15-inch depth for high-density fiber termination and/or splicing
- Stackable and adjustable fiber rings simplify cable organization
- · Front saddles pivot for improved patch cord routing
- Removable front and rear covers offer better access to the interior of the enclosure
- Removable rubber grommet allows for pre-terminated fiber trunk install, protects cable, and minimizes dust build-up
- Sliding tray (an option in 1RU and 2RU enclosures) glides forward and backward for front and rear bulkhead access after installation, and removes completely from enclosure for ease of field terminations and splicing
- · Constructed of 16-gauge steel, powder-coated black
- 1RU or 2RU Retrofit Sliding Trays, sold separately, allow for higher-density applications using HDX MTP<sup>®</sup> Cassettes or HDX Adapter Plates (sliding tray does not accommodate splice trays)
- Convert to HDX cassettes or adapter plate using conversion bracket (sold separately)

## **DESIGN CONSIDERATIONS**

- Accepts SDX adapter plates, splice modules and/or cassettes
- Optional cable strain-relief mounting kit (for installation on side of enclosure or on rack post)
- 19-inch or 23-inch enclosure rack-mount option (23-inch 1RU mounting bracket sold separately)
- Protrudes 4.5 inches from mounting ears to align with Leviton VERSI-DUCT<sup>™</sup> Cable Management System
- Capable of storing up to 3 meters of 900  $\mu m$  tight-buffered fiber per adapter
- Adapter plate on 3RU/4RU orients horizontally or vertically for optimal density
- · Door lock option available on front, rear, or both
- Enclosures are sold empty (unloaded)
- Enclosures include an accessory kit consisting of cable ties, mounting screws, ID label, and spiral wrap (for cable protection on units with a sliding tray)

## **STANDARDS & REGULATIONS**

• ANSI/TIA-568.3-D

## **COUNTRY OF ORIGIN**

Mexico

## WARRANTY INFORMATION

For Leviton product warranties, go to leviton.com/ns/warranty

Page 1 of 3

## **PRODUCT SPECIFICATIONS**

## 5RxUM-xxx

## **MECHANICAL SPECIFICATIONS**

 Dimensions:
 See below


 Capacity:
 See below

 Materials:
 Constructed of 16-gauge steel, powder-coated black.


 Plastic parts made using self-extinguishing ABS and polycarbonate materials rated UL 94V-2. Grommet material made of Santoprene®, a thermoplastic rubber elastomer.


 Temperature (Installation): -10 °C to +60 °C


Temperature (Operating): -10 °C to +60 °C

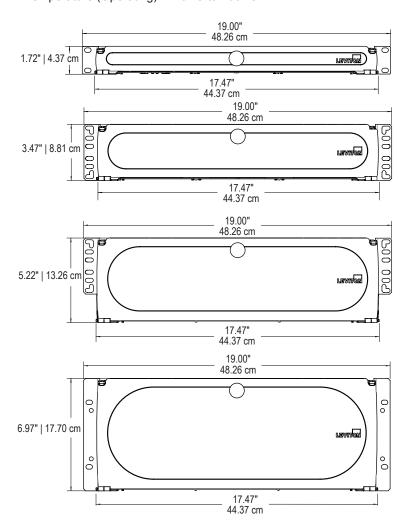

•	•		•	00	0	
		15.78" 40.08 cm				







DENSITY			
Rack Unit	Fibers	SDX Adapter Plates, Splice Modules or MTP® Cassettes	Splice Trays
1RU	72	Up to 3	Up to 3
2RU	144	Up to 6	Up to 6
3RU	216	Up to 9 (horizontal adapter plate/module orientation)	Up to 12
3RU	288	Up to 12 (vertical adapter plate/module orientation)	Up to 12
4RU	288	Up to 12 (vertical adapter plate/module orientation)	Up to 12
4RU	360	Up to 15 (horizontal adapter plate/module orientation)	Up to 12

#### Page 2 of 3

Copyright © 2023 Leviton Manufacturing Co., Inc. All rights reserved. Leviton reserves the right to modify product specifications without notice.

**5RXUM-XXX** 

## **PRODUCT SPECIFICATIONS 5RxUM-xxx**



DENSITY USING RETRO-FIT SLIDING TRAY				
Rack Unit	Fibers	HDX Adapter Plate, Splice Module or MTP <sup>®</sup> Cassettes		
1RU	96	Up to 8		
2RU	192	Up to 16		

OPT-X <sup>™</sup> 1000i SDX RACK-MOUNT ENCLOSURES	
Description	Part No.
1RU Enclosure, Empty	5R1UM-F03
1RU Enclosure, Empty, with sliding tray	5R1UM-S03
2RU Enclosure, Empty	5R2UM-F06
2RU Enclosure, Empty, with sliding tray	5R2UM-S06
3RU Enclosure, Empty	5R3UM-F09
3RU Enclosure, Empty	5R3UM-F12
4RU Enclosure, Empty	5R4UM-F12
4RU Enclosure, Empty	5R4UM-F15
Enclosure includes an appagaany kit which consists of apple tice, mounting acrows, ID labo	and aniral wran

Enclosure includes an accessory kit which consists of cable ties, mounting screws, ID label, and spiral wrap (for cable protection on units with sliding tray)

ACCESSORIES	
Description	Part No.
Retrofit Sliding Tray, 2U (for use with HDX Cassettes/Plates)	5R2UR-TRY
Retrofit Sliding Tray, 1U (for use with HDX Cassettes/Plates)	5R1UR-TRY
Universal Cable Clamp Kit, single cable grommet (for enclosure mounting)	5RCMP-KIT
Universal Cable Clamp Kit, multiple cable grommet (for enclosure mounting)	5RCMP-KT2
Universal Cable Clamp Kit (for rack post mounting)	5RCMR-KIT
Universal 0 RU Patch Cord Managers	5RCMT-VFG
HDX to SDX Adapter Bracket	HDXAD-ACC
Fiber Cable Management 1/4 Round Ring Kit (bag of four)	5R100-14R*
1RU Enclosure 23" Rack and Cabinet Mounting Bracket	5R1RU-023
Lock and Key	5L000-KAL
* Not for use in Potrofit Sliding Tray	

\* Not for use in Retrofit Sliding Tray

For further support information, visit leviton.com/ns/support MTP® is a registered trademark of US Conec, Ltd. Santoprene® is a registered trademark of Exxon Mobil Corporation

Page 3 of 3

### USA

Network Solutions Headquarters +1 (800) 722 2082 infoUSA@leviton.com

#### Asia Pacific +852 3620 2602

Canada +1 (800) 461 2002 infoAPAC@leviton.com infoCanada@leviton.com

Europe +44 (0) 1592 772124 infoEurope@leviton.com

Latin America MX: +52 (55) 2128 6286 LATAM: +52 (55) 2333 5963 infoLATAM@leviton.com

Middle East & Africa +971 (4) 247 9800 infoMEA@leviton.com

Leviton Berk-Tek Cable: +1 (800) 237 5835 berktek.info@leviton.com

NETWORK SOLUTIONS PRODUCTS ARE AVAILABLE WORLDWIDE IN OVER 100 COUNTRIES. VISIT US ONLINE AT LEVITON.COM/NS TO LEARN MORE.