


Installation Instructions

1x4 Bridged Telephone Module

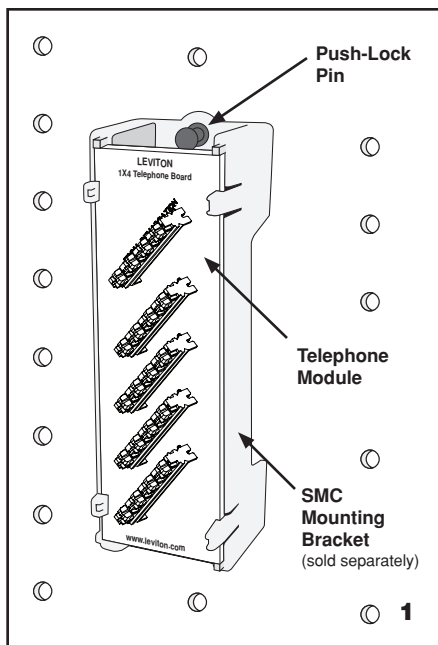

1x4 Bridged Telephone Module

DESCRIPTION

The 1x4 Bridged Telephone Module features 5 sets of 110 IDC punchdowns. Any set can be used at the "input" set, bridging up to four lines of telephone service to the other four sets. UTP cable can be punched down on each of the four "output" sets to distribute service to remote locations throughout the house.


INSTALLATION

To install, simply snap the 1x4 Bridged Telephone Module into the mounting bracket (**Cat. No. 47612-SBK - sold separately**) and align the Push-Lock Pins with the grid holes of the SMC. Module may be mounted horizontally or vertically. With the Push-Lock Pins in the "out" position, press the unit into the grid in the desired location and secure by pushing the Push-Lock Pins "in" (refer to Figure 1).

110 IDC Wiring Termination:

Using an industry standard punchdown tool, wire the 110 IDC connectors per the T568A wiring configuration as shown below. The wall jack should also comply with T568A wiring configuration.

- NOTE:** Blue = Line 1
 Orange = Line 2
 Green = Line 3
 Brown = Line 4



- White / Blue
- Blue
- White / Orange
- Orange
- White / Green
- Green
- White / Brown
- Brown

IMPORTANT INSTRUCTIONS

1. Read and understand all instructions. Follow all warnings and instructions marked on the product.
2. Do not use this product near water—e.g., near a tub, wash basin, kitchen sink or laundry tub, in a wet basement, or near a swimming pool.
3. Never push objects of any kind into this product through openings, as they may touch dangerous voltages.
4. SAVE THESE INSTRUCTIONS.

SAFETY INFORMATION

1. Never install communications wiring or components during a lightning storm.
2. Never install communications components in wet locations unless the components are designed specifically for use in wet locations.
3. Never touch uninsulated wires or terminals unless the wiring has been disconnected at the network interface.
4. Use caution when installing or modifying communications wiring or components.
5. To prevent electrical shock, each opening must be filled with a module.

LIMITED 2 YEAR WARRANTY AND EXCLUSIONS

Leviton warrants to the original consumer purchaser and not for the benefit of anyone else that this product at the time of its sale by Leviton is free of defects in materials and workmanship under normal and proper use for two years from the purchase date. Leviton's only obligation is to correct such defects by repair or replacement, at its option, if within such two year period the product is returned prepaid, with proof of purchase date, and a description of the problem to **Leviton Manufacturing Co., Inc., Att: Quality Assurance Department, 59-25 Little Neck Parkway, Little Neck, New York 11362-2591**. This warranty excludes and there is disclaimed liability for labor for removal of this product or reinstallation. This warranty is void if this product is installed improperly or in an improper environment, overloaded, misused, opened, abused, or altered in any manner, or is not used under normal operating conditions or not in accordance with any labels or instructions. **There are no other or implied warranties of any kind, including merchantability and fitness for a particular purpose**, but if any implied warranty is required by the applicable jurisdiction, the duration of any such implied warranty, including merchantability and fitness for a particular purpose, is limited to two years. **Leviton is not liable for incidental, indirect, special, or consequential damages, including without limitation, damage to, or loss of use of, any equipment, lost sales or profits or delay or failure to perform this warranty obligation.** The remedies provided herein are the exclusive remedies under this warranty, whether based on contract, tort or otherwise.

For Technical Assistance Call:
1-800-824-3005 (U.S.A. Only)
www.leviton.com



59-25 Little Neck Parkway,
Little Neck, N.Y. 11362-2591, USA
Tech Support: 800-824-3005
www.leviton.com

DI-212-47609-00A