

# British Standard Receptacle - BS 1363 Switched Outlet

## APPLICATION

The Leviton British Standard Receptacle combines a modern Decora design with outstanding performance. This 13 amp 250 volt, tamper-resistant receptacle, includes a double pole switch, integrated to the circuit, to cut off the current on both contacts. The BSRDP is a fantastic addition to the Leviton prdouct family of electrial wiring devices. Its safety, reliability, and performance is another example of Leviton's committment to today's market needs.

#### **Residential and Light Commercial Applications**

- Living Rooms
- OfficesEducation Facilities
- KitchensBathrooms
- Restuarants
- BedroomsHallways
- HotelsAnd More...

## **Compatibile Markets -** 13A, 250V, 50-60Hz

The following markets commonly use the British Standard Receptacle:

• Cyprus

Ireland

Saudi Arabia

And More...

- SingaporeUnited Arab Emirates
- KuwaitMalaysia
- United Kingdom
- Oman
- Qatar

### **Features and Benefits**

- Tamper-resistant receptacle (safety)
- Accommodates plug and outlet type G markets
- Aesthetically appealing Decora design
- Compatible with Leviton Decora screwless
  and standard wallplates
- Durability in impact resistant materials
- Speedy installation



### Electrical

- Rating 13A, 250V
- Frequency 50 60Hz
- Self-Grounding

### Mechanical

 Terminal ID: Line marked on device "L"; Neutral marked on device "N"; Ground green screw

**BSRDP-W** 

Terminal Accom. 14-12 AWG

#### Environmental

• Flammability rated V-2 per UL94


## STANDARDS AND CERTIFICATIONS

- BS 1363
- SASO 2203
- IEC 60884-1
- IEC 60884-2-3

## WARRANTY

2 Year Limited

## **DIMENSIONAL DRAWINGS**

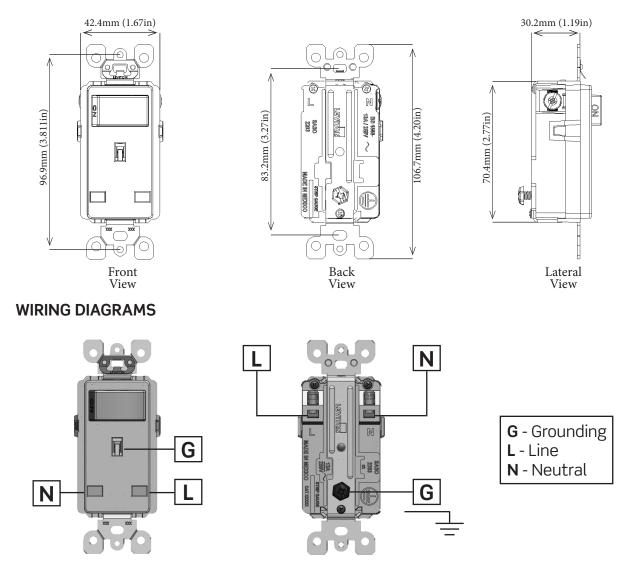

## **ORDERING INFORMATION**

CATALOG NUMBER	DESCRIPTION	COLOR
BSRDP-W	British Standard Receptacle, 13 Amp, 250 Volt, Decora, Tamper- Resistant, with Double-Pole Switch Integrated to the Curcuit, to Cut Off the Current On Both Contacts	White
BSRDP-I	British Standard Receptacle, 13 Amp, 250 Volt, Decora, Tamper- Resistant, with Double-Pole Switch Integrated to the Curcuit, to Cut Off the Current On Both Contacts	lvory

Leviton Mfg. Co., Inc. 201 North Service Road, Melville, NY 11747 Tech Line: 1-800-824-3005 Fax: 1-800-832-9538 www.leviton.com © 2014 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.

#### Leviton has a global presence.

Please visit our website to find your local Leviton representative and/or office near you: www.leviton.com/worldwide